

12/31/97
JCS61 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

Total Pages **30**

First Named Inventor or Application Identifier

Harley J. Staber, et al.

Express Mail Label No.

RB892159334US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages **22**]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets **5**]
4. Oath or Declaration [Total Pages **1**]
 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application. Status still proper and desired
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

NAME Wesley T. Noah, Esq.
Siecor Operations, LLC

ADDRESS P. O. Box 489

CITY Hickory STATE NC ZIP CODE 28601-0489

COUNTRY USA TELEPHONE 704-327-5319 FAX 704-327-5206

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

<h2 style="margin: 0;">FEE TRANSMITTAL</h2> <p style="font-size: small; margin: 5px 0;">Note: Effective October 1, 1997. Patent fees are subject to annual revision.</p>	<p style="text-align: center; font-weight: bold; margin: 0;">Complete if Known</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 60%;">Application Number</td><td></td></tr> <tr><td>Filing Date</td><td></td></tr> <tr><td>First Named Inventor</td><td>Staber</td></tr> <tr><td>Group Art Unit</td><td></td></tr> <tr><td>Examiner Name</td><td></td></tr> <tr><td>Attorney Docket Number</td><td></td></tr> </table>	Application Number		Filing Date		First Named Inventor	Staber	Group Art Unit		Examiner Name		Attorney Docket Number	
Application Number													
Filing Date													
First Named Inventor	Staber												
Group Art Unit													
Examiner Name													
Attorney Docket Number													
TOTAL AMOUNT OF PAYMENT (\$)													

<p style="text-align: center; font-weight: bold; margin: 0;">METHOD OF PAYMENT (check one)</p> <p>1. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:</p> <p>Deposit Account Number <u>19-2167</u></p> <p>Deposit Account Name <u>Siecor Corporation</u></p> <p><input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 <input type="checkbox"/> Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance</p> <p>2. <input type="checkbox"/> Payment Enclosed:</p> <p style="margin-left: 20px;"><input type="checkbox"/> Check <input type="checkbox"/> Money Order <input type="checkbox"/> Other</p> <p style="text-align: center; font-weight: bold; margin: 10px 0;">FEE CALCULATION</p> <p>1. FILING FEE</p> <table style="width: 100%; font-size: small;"> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> <tr><td>101 790</td><td>201 395</td><td>Utility filing fee</td><td>790</td></tr> <tr><td>106 330</td><td>206 165</td><td>Design filing fee</td><td></td></tr> <tr><td>107 540</td><td>207 270</td><td>Plant filing fee</td><td></td></tr> <tr><td>108 790</td><td>208 395</td><td>Reissue filing fee</td><td></td></tr> <tr><td>114 150</td><td>214 75</td><td>Provisional filing fee</td><td></td></tr> <tr><td colspan="3" style="text-align: right;">SUBTOTAL (1)</td><td>(\$ 790)</td></tr> </table> <p>2. CLAIMS</p> <table style="width: 100%; font-size: small;"> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> <tr><td>103 22</td><td>203 11</td><td>Claims in excess of 20</td><td></td></tr> <tr><td>102 82</td><td>202 41</td><td>Independent claims in excess of 3</td><td></td></tr> <tr><td>104 270</td><td>204 135</td><td>Multiple dependent claim</td><td></td></tr> <tr><td>109 82</td><td>209 41</td><td>Reissue independent claims over original patent</td><td></td></tr> <tr><td>110 22</td><td>210 11</td><td>Reissue claims in excess of 20 and over original patent</td><td></td></tr> <tr><td colspan="3" style="text-align: right;">SUBTOTAL (2)</td><td>(\$ 872)</td></tr> </table>	Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid	101 790	201 395	Utility filing fee	790	106 330	206 165	Design filing fee		107 540	207 270	Plant filing fee		108 790	208 395	Reissue filing fee		114 150	214 75	Provisional filing fee		SUBTOTAL (1)			(\$ 790)	Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid	103 22	203 11	Claims in excess of 20		102 82	202 41	Independent claims in excess of 3		104 270	204 135	Multiple dependent claim		109 82	209 41	Reissue independent claims over original patent		110 22	210 11	Reissue claims in excess of 20 and over original patent		SUBTOTAL (2)			(\$ 872)	<p style="text-align: center; font-weight: bold; margin: 0;">FEE CALCULATION (continued)</p> <p>3. ADDITIONAL FEES</p> <table style="width: 100%; font-size: small;"> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> <tr><td>105 130</td><td>205 65</td><td>Surcharge - late filing fee or oath</td><td></td></tr> <tr><td>127 50</td><td>227 25</td><td>Surcharge - late provisional filing fee or cover sheet</td><td></td></tr> <tr><td>139 130</td><td>139 130</td><td>Non-English specification</td><td></td></tr> <tr><td>147 2,520</td><td>147 2,520</td><td>For filing a request for reexamination</td><td></td></tr> <tr><td>112 920*</td><td>112 920*</td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr> <tr><td>113 1,840*</td><td>113 1,840*</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr> <tr><td>115 110</td><td>215 55</td><td>Extension for reply within first month</td><td></td></tr> <tr><td>116 400</td><td>216 200</td><td>Extension for reply within second month</td><td></td></tr> <tr><td>117 950</td><td>217 475</td><td>Extension for reply within third month</td><td></td></tr> <tr><td>118 1,510</td><td>218 755</td><td>Extension for reply within fourth month</td><td></td></tr> <tr><td>128 2,060</td><td>228 1,030</td><td>Extension for reply within fifth month</td><td></td></tr> <tr><td>119 310</td><td>219 155</td><td>Notice of Appeal</td><td></td></tr> <tr><td>120 310</td><td>220 155</td><td>Filing a brief in support of an appeal</td><td></td></tr> <tr><td>121 270</td><td>221 135</td><td>Request for oral hearing</td><td></td></tr> <tr><td>138 1,510</td><td>138 1,510</td><td>Petition to institute a public use proceeding</td><td></td></tr> <tr><td>140 110</td><td>240 55</td><td>Petition to revive - unavoidable</td><td></td></tr> <tr><td>141 1,320</td><td>241 660</td><td>Petition to revive - unintentional</td><td></td></tr> <tr><td>142 1,320</td><td>242 660</td><td>Utility issue fee (or reissue)</td><td></td></tr> <tr><td>143 450</td><td>243 225</td><td>Design issue fee</td><td></td></tr> <tr><td>144 670</td><td>244 335</td><td>Plant issue fee</td><td></td></tr> <tr><td>122 130</td><td>122 130</td><td>Petitions to the Commissioner</td><td></td></tr> <tr><td>123 50</td><td>123 50</td><td>Petitions related to provisional applications</td><td></td></tr> <tr><td>126 240</td><td>126 240</td><td>Submission of Information Disclosure Stmt</td><td></td></tr> <tr><td>581 40</td><td>581 40</td><td>Recording each patent assignment per property (times number of properties)</td><td></td></tr> <tr><td>146 790</td><td>246 395</td><td>Filing a submission after final rejection (37 CFR 1.129(a))</td><td></td></tr> <tr><td>149 790</td><td>249 395</td><td>For each additional invention to be examined (37 CFR 1.129(b))</td><td></td></tr> <tr><td colspan="3">Other fee (specify) _____</td><td></td></tr> <tr><td colspan="3">Other fee (specify) _____</td><td></td></tr> <tr><td colspan="3" style="text-align: right;">SUBTOTAL (3)</td><td>(\$)</td></tr> </table> <p style="font-size: x-small;">* Reduced by Basic Filing Fee Paid</p>	Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid	105 130	205 65	Surcharge - late filing fee or oath		127 50	227 25	Surcharge - late provisional filing fee or cover sheet		139 130	139 130	Non-English specification		147 2,520	147 2,520	For filing a request for reexamination		112 920*	112 920*	Requesting publication of SIR prior to Examiner action		113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action		115 110	215 55	Extension for reply within first month		116 400	216 200	Extension for reply within second month		117 950	217 475	Extension for reply within third month		118 1,510	218 755	Extension for reply within fourth month		128 2,060	228 1,030	Extension for reply within fifth month		119 310	219 155	Notice of Appeal		120 310	220 155	Filing a brief in support of an appeal		121 270	221 135	Request for oral hearing		138 1,510	138 1,510	Petition to institute a public use proceeding		140 110	240 55	Petition to revive - unavoidable		141 1,320	241 660	Petition to revive - unintentional		142 1,320	242 660	Utility issue fee (or reissue)		143 450	243 225	Design issue fee		144 670	244 335	Plant issue fee		122 130	122 130	Petitions to the Commissioner		123 50	123 50	Petitions related to provisional applications		126 240	126 240	Submission of Information Disclosure Stmt		581 40	581 40	Recording each patent assignment per property (times number of properties)		146 790	246 395	Filing a submission after final rejection (37 CFR 1.129(a))		149 790	249 395	For each additional invention to be examined (37 CFR 1.129(b))		Other fee (specify) _____				Other fee (specify) _____				SUBTOTAL (3)			(\$)
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid																																																																																																																																																																														
101 790	201 395	Utility filing fee	790																																																																																																																																																																														
106 330	206 165	Design filing fee																																																																																																																																																																															
107 540	207 270	Plant filing fee																																																																																																																																																																															
108 790	208 395	Reissue filing fee																																																																																																																																																																															
114 150	214 75	Provisional filing fee																																																																																																																																																																															
SUBTOTAL (1)			(\$ 790)																																																																																																																																																																														
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid																																																																																																																																																																														
103 22	203 11	Claims in excess of 20																																																																																																																																																																															
102 82	202 41	Independent claims in excess of 3																																																																																																																																																																															
104 270	204 135	Multiple dependent claim																																																																																																																																																																															
109 82	209 41	Reissue independent claims over original patent																																																																																																																																																																															
110 22	210 11	Reissue claims in excess of 20 and over original patent																																																																																																																																																																															
SUBTOTAL (2)			(\$ 872)																																																																																																																																																																														
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid																																																																																																																																																																														
105 130	205 65	Surcharge - late filing fee or oath																																																																																																																																																																															
127 50	227 25	Surcharge - late provisional filing fee or cover sheet																																																																																																																																																																															
139 130	139 130	Non-English specification																																																																																																																																																																															
147 2,520	147 2,520	For filing a request for reexamination																																																																																																																																																																															
112 920*	112 920*	Requesting publication of SIR prior to Examiner action																																																																																																																																																																															
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action																																																																																																																																																																															
115 110	215 55	Extension for reply within first month																																																																																																																																																																															
116 400	216 200	Extension for reply within second month																																																																																																																																																																															
117 950	217 475	Extension for reply within third month																																																																																																																																																																															
118 1,510	218 755	Extension for reply within fourth month																																																																																																																																																																															
128 2,060	228 1,030	Extension for reply within fifth month																																																																																																																																																																															
119 310	219 155	Notice of Appeal																																																																																																																																																																															
120 310	220 155	Filing a brief in support of an appeal																																																																																																																																																																															
121 270	221 135	Request for oral hearing																																																																																																																																																																															
138 1,510	138 1,510	Petition to institute a public use proceeding																																																																																																																																																																															
140 110	240 55	Petition to revive - unavoidable																																																																																																																																																																															
141 1,320	241 660	Petition to revive - unintentional																																																																																																																																																																															
142 1,320	242 660	Utility issue fee (or reissue)																																																																																																																																																																															
143 450	243 225	Design issue fee																																																																																																																																																																															
144 670	244 335	Plant issue fee																																																																																																																																																																															
122 130	122 130	Petitions to the Commissioner																																																																																																																																																																															
123 50	123 50	Petitions related to provisional applications																																																																																																																																																																															
126 240	126 240	Submission of Information Disclosure Stmt																																																																																																																																																																															
581 40	581 40	Recording each patent assignment per property (times number of properties)																																																																																																																																																																															
146 790	246 395	Filing a submission after final rejection (37 CFR 1.129(a))																																																																																																																																																																															
149 790	249 395	For each additional invention to be examined (37 CFR 1.129(b))																																																																																																																																																																															
Other fee (specify) _____																																																																																																																																																																																	
Other fee (specify) _____																																																																																																																																																																																	
SUBTOTAL (3)			(\$)																																																																																																																																																																														

SUBMITTED BY				Complete (if applicable)	
Typed or Printed Name	Wesley T. Noah, Esq.			Reg. Number	35,627
Signature				Date	12/31/97
				Deposit Account User ID	495

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Certificate of Express Mailing:

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service as Express Mail, addressed to Box Patent Application, Assistant Commissioner of Patents, Washington, DC 20231, on the 31 day of Dec, 1997.

Express Mail No.: B3892159334US


Pamela J. Rieves

In the United States Patent and Trademark Office

Box Patent Application
Assistant Commissioner of Patents
Washington, D. C., 20231

Dear Sir:

Transmitted herewith for filing is the following described Patent Application:

Inventors:

Harley J. Staber
751 Blue Jay Lane
Coppell, TX 75019


Chanh Vo
1432 Sierra Springs Dr. #1424
Bedford, TX 76021

John J. Napiorkowski
7609 Primrose Drive
Irving, TX 75063

Assignee: Siecor Operations, LLC

Title: XDSL Splitter Line Module for
Network Interface Device

Respectfully Submitted,



Wesley T. Noah, Attorney for Applicant
Reg. No. 35.627

P. O. Box 489, Hickory, N. C., 28603-0489

Telephone: (704) 327-5319 Fax: 327-5206

Date: 12/31/97

FIELD OF THE INVENTION

5 outside plant wire pair and two inside wiring pairs.

BACKGROUND OF THE INVENTION

ADSL (Asymmetric Digital Subscriber Line) is a modem technology that transmits multimedia and high speed data over existing twisted-pair telephones lines concurrently with Plain Old Telephone Service (POTS) signals. VDSL is a higher speed variation of ADSL. The multimedia and high speed data are at a higher frequency than the POTS signals, and components have been developed that can split the higher frequency multimedia and/or data from the lower frequency POTS signal at either end of the transmission path. IDSL is a variation wherein the multimedia and/or high speed data is transmitted concurrently with an ISDN signal instead of the POTS signal. The ISDN, while a higher frequency than the POTS signal, is lower than the multimedia or high speed data signal. Other variations may exist or be developed where signals of differing frequencies are transmitted over existing twisted-pair wiring to a subscriber. The term xDSL will be used herein to generically refer to these different versions of transmitting higher frequency signals (e.g. ADSL, VDSL) over twisted pair concurrently with a relatively lower frequency signal (e.g., POTS, ISDN, or out-of-band signaling used in special services). The terms "first signal" and "second signal" will be used herein to generically refer to at least two different frequency signals transmitted concurrently over twisted-pair wiring and that are intended to be separated, or split, at the subscriber. The term "combined signals" will be used to refer to both the first and second signals combined over a line.

An xDSL architecture connects an xDSL modem on each end of a twisted-pair telephone line, that is, at the "central office" (or node or remote terminal) and at the premises of the subscriber (or customer). The terms "splitting" or "splitter" are used to refer to a circuit or component, for example, a low pass filter or low pass and high pass filter combination, that

separates a first signal from a combined signal in the example of a low pass filter and separates both the first and second signals from the combined signal in the example of the low pass and high pass filter combination. Components other than low pass and high pass filters may exist or be developed that also perform this splitting function. The structure and nature of the various
5 splitter circuits or components form no part of the present invention other than the fact that they “split” the combined signal and must be interconnected into an xDSL network in some manner at the customer end of the network.

Splitters have typically been housed with the xDSL modems. However, in view of the requirement for a demarcation point for at least the POTS signal at the network interface device
10 (NID) at the subscriber, some architectural issues arise on how to accommodate the xDSL signal in the existing subscriber interface architecture. U.S. Patent Nos. 4,488,008; 4,741,032; 5,355,408; and 5,414,765 show various examples of NIDs in use today where POTS modules that have a demarcation point are removably mounted in the NID.

A splitter sold by Alcatel under the designation “A1000 ADSL Remote Splitter” is
15 disclosed as being installed in a NID, however, the Alcatel product suffers from potential drawbacks. First, the installation of the Alcatel splitter requires that the inside wiring be disconnected from the subscriber terminals of one of the POTS modules mounted in the NID and connected to the splitter. Then wires from the splitter are installed to the subscriber terminals on the POTS module. This removal of wiring and rewiring can be a cumbersome process and
20 significantly increases the potential for a wiring mistake on installation. This is especially so considering that POTS modules were designed with a demarcation point that eliminated the need for the subscriber to disconnect any terminal wiring. Secondly, the Alcatel splitter does not provide a separate demarcation point for the POTS-only signal or for the xDSL-only signal.

Because the splitter is placed between the demarcation point and the inside wiring, the combined signal passes through the demarcation point (the RJ-11 jack and plug) thereby preventing the ability to have a demarcation point for each isolated signal. Also, the Alcatel splitter takes up four line module spaces in a six line NID. This eliminates its use in NIDs of less than 5 lines or NIDs without four consecutive line module spaces available. Additionally, the Alcatel splitter mounts to an adapter plate that flexes a mounting tang with a projection in the NID as it is snapped into place in the NID by the customer with the telco door closed. Flexing of the mounting tang with the telco door closed is not the intended manner of use of the mounting tang which is meant to flexibly receive POTS modules therein with the telco door open. While insertion is possible while the telco door is closed due to the ramping on the top of the projection on the mounting tang, removal of the adapter plate is not practical without opening the telco door because the tang cannot be readily flexed to clear the projection from the adapter plate. As with the POTS module, ready removal of the adapter plate from the NID requires flexing of the tang that can only be sufficiently flexed when the telco door is open. Because customers do not have the authority to open the telco door, a customer will not be able to practically remove the Alcatel splitter adapter from the NID and may need to place a service call to remove the splitter adapter.

Accordingly, a need exists for an xDSL splitter module for use in the NID that overcomes one or more of the above discussed drawbacks.

SUMMARY OF THE INVENTION

The present invention provides an improved apparatus for accommodating the xDSL splitter in the existing Network Interface Devices (NIDs). One aspect of the present invention provides a splitter module for mounting in a network interface device (NID) for providing a

5 demarcation point between a pair of outside plant wires and a first and a second pair of subscriber inside wires. The first pair of inside wires is for carrying a POTS signal, the second pair of inside wires is for carrying an xDSL signal and the pair of outside plant wires is for carrying a combined POTS and xDSL signal. The NID has a housing defining an accessible interior. The splitter

10 module comprises a block of a size suitable for placement in the interior of the NID and an xDSL splitter circuit housed in the block with a first pair of contacts for electrical connection to the pair of outside plant wires and a second pair of contacts. A first circuit component of the circuit is electrically between the first and the second pair of contacts and designed to pass only POTS

15 signals from the first pair of contacts to the second pair of contacts. A first inside pair of terminals is located on the block, electrically connected to the second pair of contacts, and configured for having the first pair of inside wires connected thereto. A second inside pair of terminals is located on the block, electrically connected to the outside pair of terminals so as to receive at least the xDSL signal, and configured for having the second pair of inside wires

20 connected thereto. A POTS jack is connected to the block and capable of receiving a plug from a standard telephone. The POTS jack is electrically connectable to the second pair of contacts to allow for testing of the POTS signal by the subscriber by inserting a telephone plug from a telephone into the POTS jack when the POTS jack is electrically connected to the second pair of contacts.

Another aspect of the present invention is the combination of the splitter module with the NID. In a more particular aspect, the NID has a plurality of identical mounting locations and the splitter module has a footprint for removable attachment to one or more of the mounting locations. The splitter module is constructed such that other line modules can be located in adjacent mounting locations without interfering with the splitter module.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a NID with the preferred embodiment of the splitter module of the present invention mounted therein;

Figure 2 is a perspective view of the preferred embodiment of the splitter module of the present invention;

Figure 3 is an exploded perspective view of the module of Figure 2;

Figure 4 is a perspective view of the carrier plate used in the module of Figure 2;

Figure 5 is a top view of the module of Figure 2;

Figure 6 is a wiring diagram of the preferred embodiment of the splitter module of the present invention;

Figure 7 is an alternative wiring diagram for a splitter module of the present invention; and

Figure 8 is another alternative wiring diagram for a splitter module of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference to Figures 1-6, the preferred embodiment of various aspects of the present invention are shown. With reference to Figure 1, one arrangement of xDSL splitter assembly 10 is shown. Assembly 10 comprises network interface device (NID) 12 with POTS line module 14 and splitter module 16 mounted therein. In the arrangement depicted, line module 14 is a conventional line module that provides a demarcation point between one of the subscriber's phone lines and the telephone company's outside plant lines. If the customer only has one POTS line then POTS module 14 would not be needed with xDSL service. POTS module 14 is included in this arrangement to illustrate that additional POTS modules can be used alongside splitter module 16 of the present invention. NID 12 has mounting surface 17 in interior 15 and has a plurality of mounting locations 18a-f of the same configuration for removably retaining one or more modules mounted thereto.

NID 12 and line module 14 in Figure 1 are a PTD NID and PTD POTS module, respectively, available from Siecor Corporation. The structure of the PTD NID and the POTS module as well as the mounting of the POTS modules to the mounting locations is disclosed in various U.S. Patents including U.S. Patent Nos. 5,153,910; 5,333,193; 5,416,837; 5,479,505; 5,548,641 and other related patents (collectively, the PTD patents). These patents are incorporated herein by reference. Other commonly used NIDs and POTS modules include the Siecor 7600 NID and the Keptel SNI 4600. These NIDs also have a plurality of identical mounting locations for removably receiving one or more POTS modules mounted therein.

The wiring of these various NIDs to provide a point of demarcation for a POTS signal between outside plant wiring and the subscriber's inside wiring is well known. With respect to

the PTD NID, the PTD POTS module contains the protector element and as such is distinguished from the other commonly used POTS modules that are wired to separate station protectors on the telephone compartment side of the NID. Because the PTD POTS module contains the protector, it will most likely always be telephone company owned even though the customer must have access to the door on the top of the POTS module to access the RJ-11 test jack. Providing this access while preventing customer removal of the POTS module is also disclosed in the PTD patents.

NID 12 has housing 13 with interior 15 that is divided into customer compartment 33 and telephone compartment 34. Inner door 35 closes over telephone compartment 34 and prevents removal of POTS module 14 and splitter module 16 from NID 12. Outer door 36 closes over inner door 35 and customer compartment 33 onto housing 13, and the customer is able to open outer door 36 to access customer compartment 33. The other commonly used NIDs have other door arrangements to similarly prevent removal of a POTS module from the NID while still providing access to the test jack on the POTS module.

Splitter module 16 of the present invention comprises block 40 which has base 42 which has a width of two adjacent mounting locations and has mounting footprint 43 configured for removable attachment to two mounting locations 18. Figure 1 shows splitter module removably attached at mounting locations 18b-c. Base 42 has walls 48 and is similar to the base of the PTD patents except for the fact that it is the width of two mounting locations and has tabs 50 spaced to properly engage across two mounting locations 18 in NID 12. Walls 48 define cavity 52 (see cut away in Figure 3) in base 42. Base 42 is preferably two mounting locations wide to provide sufficient space to house the xDSL splitter circuit components. However, it should be understood that as component sizes may decrease or are arranged in a more space saving manner, base 42

may be only one mounting location in width. Conversely, base 42 may be more than two mounting locations in width should additional or different components require more space.

Block 40 has carrier plate 44 mounted over base 42. Carrier plate 44 is generally planar with bottom side 56 facing toward base 42 and top side 58 facing opposite thereto. Carried on bottom side 56 is circuit board 62 which has various splitter components 64 thereon. Also carried on bottom side 56 is protector element 68 which is shown in Figure 3 as gas tube 70. Welding ridge 66 extends around the periphery of bottom side 56 of carrier plate 44 to seal between carrier plate 44 and base 42 when ultrasonically welded. When carrier plate 44 is attached to base 42, splitter components 64 and protector element 68 extend into cavity 52 of base 42.

Top side 58 of carrier plate 44 is divided into POTS section 72 and xDSL section 74. POTS section 72 carries first terminal block 76 which appears like the terminal block of the PTD patents but does not contain any terminals. It is included to at least provide structure for the optional locking of first pivoting door 82 of first subscriber bridge 80 as disclosed in the PTD patents. First subscriber bridge 80 has terminals 83 for connection of a first pair of inside subscriber wiring 32, for example the subscriber's inside POTS wiring. First subscriber bridge 80 and first pivoting door 82 are like the subscriber bridge and pivoting door of the PTD patents. First pivoting door 82 has first plug 84, preferably an RJ-11 plug, which inserts into first jack 86, preferably an RJ-11 jack, when first door 82 is closed. First plug 84 and first jack 86 provide first demarcation point 85 for a first signal, for example the POTS signal. POTS section 72 is like the top of the line module of the PTD patents with one exception being that the terminal block 76 does not have terminals for connection of the telephone company outside plant wires.

xDSL section 74 carries second terminal block 96 which has first terminals 98, for example outside plant terminals shown as insulation displacement connectors (IDCs) 97, for

connection of the telephone company outside plant wires as is disclosed in the PTD patents.

xDSL section 74 has second subscriber bridge 100 with second pivoting door 102 as disclosed in the PTD patents. Second subscriber bridge 100 has terminals 103 for connection of a second pair of inside subscriber wiring 28, for example the subscriber's inside xDSL wiring. Second

subscriber bridge 100 and second pivoting door 102 are like the subscriber bridge and pivoting door of the PTD patents with at least the exception that the wiring is preferably for xDSL.

Second pivoting door 102 has second plug 104, preferably an RJ-45 plug, which inserts into second jack 106, preferably an RJ-45 jack, when second door 102 is closed. Second plug 104 and second jack 106 provide second demarcation point 105 for a second signal, for example, the

xDSL signal, or for the combined signal depending on the type of splitter circuit. xDSL section 74 is like the top of the line module of the PTD patents with at least one exception being that the plug and jack are preferably intended for the xDSL signal. While RJ-11 and RJ-45 plugs and jacks are preferred due to their ease of use by subscribers, sections 72 and 74 can be implemented with any matable/rematable connector type suitable for use in telecommunications applications.

With reference to Figure 5, first door 82 is labeled with first indicia 112, for example "VOICE", and second door 102 is labeled with second indicia 114, for example "DATA", so that the subscriber can distinguish between the POTS demarcation point 85 and the xDSL demarcation point 105. Indicia 113 and 115 readily identify the "DATA" and "VOICE" wire pairs of a particular splitter module in the event multiple splitter modules are mounted adjacent to each other or with conventional line modules.

With reference to Figure 6, the preferred wiring diagram for splitter module 16 is shown. Telephone company outside plant wire pair 20 is connected to first terminals 98. Leads 22 connect terminals 98 to protector element 68 which shorts to ground 23 to protect the subscriber

equipment when certain levels of surge occur. Leads 24 connect terminals 98 to first pair of contacts 25 on circuit board 62 which has first splitter circuit component 64 which may be a low pass filter. If there is to be no high pass filter to isolate the second signal, leads 26 electrically connect second jack 106 to a signal branch point 27 between terminals 98 and first splitter circuit component 64. Signal branch point 27 may also be at terminals 98 themselves. Second plug 104 is removably inserted in second jack 106 and is connected to terminals 103 which are connected to the second pair of subscriber inside wiring 28. Only the first signal, e.g. POTS, passes through splitter component 64 to second pair of contacts 29 which is connected to first jack 86 by leads 30 which is connected to first plug 84 which is connected to terminals 83 which are connected to first pair of subscriber inside wiring 32. It should be understood that the nature of the various terminals, leads, connections and components in Figure 6 may be readily varied and still achieve the basic connection of the splitter and provide the appropriate demarcation points on the splitter module.

For installation of splitter module 16 when a new NID is being installed at a subscriber, splitter module 16 is simply plugged into the NID as is done with the traditional single wide POTS module 14. The outside plant wires are terminated at second terminal block 96, inside POTS wiring is terminated at terminals 83 of first subscriber bridge, and inside xDSL wiring is terminated at terminals 103 of second subscriber bridge 100.

Figure 7 shows an alternative wiring diagram that incorporates second splitter circuit component 38, for example a high pass filter, placed in series between the signal branch point 27 and second jack 106 so as to pass only the second signal to inside wiring pair 28. Whether a circuit component such as second component 38 is included to pass only the xDSL signal depends on a particular application. Some applications locate such a component at the xDSL modem

which may obviate the need for a high pass filter in splitter module 16. Another example of second component 38 may be a pair of DC blocking capacitors which has been proposed as a substitute for a high pass filter.

Figure 8 shows an alternative wiring diagram that incorporates combined signal demarcation jack 90 and plug 92 to create combined demarcation point 91 in addition to the POTS demarcation point 85 and the xDSL demarcation point 105. Combined jack 90 has combined plug 92 removably inserted therein and the connection is located electrically in series between terminals 98 and the signal branch point 27. The combined signal demarcation point 91 is useful to disconnect both pairs of inside wiring from the outside plant for safety reasons. Also, it is possible to test the combined signal, the POTS signal and the xDSL signal. By having a test point on each side of the splitter components, it is possible determine if the splitter circuit of splitter module 16 has malfunctioned. In the embodiment of Figure 8, if a high pass filter is not used, the xDSL demarcation point 105 may be eliminated. Another alternative is to have combined demarcation 91 only - eliminating demarcations 85 and 105.

Although the present invention has been described with respect to a preferred embodiment, it should be understood that various changes, substitutions and modifications may be suggested to one skilled in the art and its is intended that the present invention encompass such changes, substitutions and modifications as fall within the scope of the appended claims.

THAT WHICH IS CLAIMED IS:

1. A splitter module for mounting in a network interface device (NID) for providing a demarcation point between a pair of outside plant wires and a first and a second pair of subscriber inside wires, the first pair of inside wires for carrying a first signal, the second pair of inside wires
5 for carrying a second signal and the pair of outside plant wires for carrying a combined signal of the first and the second signals, the NID having a housing defining an accessible interior and having a mounting surface therein defining a plurality of module mounting locations, the splitter module comprising:

(a) a block having a mounting footprint configured for removable attachment to at least one
10 mounting location;

(b) an outside plant pair of terminals located on the block and configured for having the pair of outside plant wires connected thereto;

(c) a splitter circuit housed in the block with a first pair of contacts electrically connected to the outside plant pair of terminals and a second pair of contacts, a first circuit component of the
15 circuit electrically between the first and the second pair of contacts and designed to pass only the first signal from the first pair of contacts to the second pair of contacts;

(d) a first jack located on the block and electrically connected to the second pair of contacts;

(e) a first plug removably located in the jack to provide a subscriber test point for the first signal upon removal of the plug from the jack;

(f) a first inside pair of terminals located on the block, electrically connected to the second pair of contacts through the subscriber test point and configured for having the first pair of inside wires connected thereto; and

(g) a second inside pair of terminals located on the block, electrically connected to the outside pair of terminals so as to receive at least the second signal, and configured for having the second pair of inside wires connected thereto.

2. The module of Claim 1 wherein the block is of a size to occupy two mounting locations and allow other modules to be placed in adjacent mounting locations.

3. The module of Claim 1 further comprising a second jack and second plug removably inserted therein located electrically in series between the outside pair of terminals and the second inside pair of terminals to provide a demarcation point for the signal received by the second inside pair of terminals.

4. The module of Claim 3 wherein the splitter circuit further comprises a third pair of contacts and a second circuit component located electrically between the first pair of contacts and the third pair of contacts and designed to pass only the second signal from the first pair of contacts to the third pair of contacts, and wherein the second jack is electrically connected to the third pair of contacts.

5. The module of Claim 1 wherein the splitter circuit further comprises a third pair of contacts and a second circuit component located electrically between the first pair of contacts and the third pair of contacts and designed to pass only the second signal from the first pair of contacts to the third pair of contacts.

6. The module of Claim 5 further comprising a combined signal jack and combined signal plug removably inserted therein located electrically in series between the outside plant pair of terminals and the first pair of contacts to provide a test point for the combined signal.

7. The module of Claim 1 further comprising a protector located in the block for conducting
5 surges to ground.

8. A splitter module for mounting in a network interface device (NID) for providing a demarcation point between a pair of outside plant wires and a first and a second pair of subscriber inside wires, the first pair of inside wires for carrying a first signal, the second pair of inside wires for carrying a second signal and the pair of outside plant wires for carrying a combined signal of the first and the second signal, the NID having a housing defining an accessible interior, the splitter module comprising:

(a) a block of a size suitable for placement in the interior of the NID;

(b) a splitter circuit housed in the block with a first pair of contacts for electrical connection to the pair of outside plant wires and a second pair of contacts, a first circuit component of the circuit electrically between the first and the second pair of contacts and designed to pass only the first signal from the first pair of contacts to the second pair of contacts;

(c) a first inside pair of terminals located on the block electrically connected to the second pair of contacts and configured for having the first pair of inside wires connected thereto; and

(d) a second inside pair of terminals located on the block, electrically connected to the outside pair of terminals so as to receive at least the second signal, and configured for having the second pair of inside wires connected thereto; and

(e) a POTS jack connected to the block and capable of receiving a plug from a standard telephone, the POTS jack electrically connectable to the second pair of contacts to allow for testing of the first signal by the subscriber by inserting a telephone plug from a telephone into the POTS jack when the POTS jack is electrically connected to the second pair of contacts.

9. The module of Claim 8 further comprising a second jack and second plug removably inserted therein located electrically in series between the outside pair of terminals and the second inside pair of terminals to provide a demarcation point for the signal received by the second inside pair of terminals.

10. The module of Claim 9 wherein the splitter circuit further comprises a third pair of contacts and a second circuit component located electrically between the first pair of contacts and the third pair of contacts and designed to pass only the second signal from the first pair of contacts to the third pair of contacts, and wherein the second jack is electrically connected to the third pair of contacts.

11. The module of Claim 8 wherein the splitter circuit further comprises a third pair of contacts and a second circuit component located electrically between the first pair of contacts and the third pair of contacts and designed to pass only the second signal from the first pair of contacts to the third pair of contacts.

12. The module of Claim 11 further comprising a combined signal jack and combined signal plug removably inserted therein located electrically in series between the outside plant pair of terminals and the first pair of contacts to provide a test point for the combined signal.

13. The module of Claim 8 wherein the POTS jack is electrically connected to the second pair of contacts during normal operation.

14. The module of Claim 8 wherein the NID has a plurality of mounting locations and the block defines a mounting footprint that is removably attachable to one or more of the mounting locations.

15. An xDSL splitter assembly, comprising:

(a) a network interface device (NID) for providing a demarcation point between a pair of outside plant wires and a first and a second pair of subscriber inside wires, the first pair of inside wires for carrying a POTS signal, the second pair of inside wires for carrying an xDSL signal and the pair of outside plant wires for carrying a combined POTS and xDSL signal, the NID having a housing defining an interior with a plurality of identical mounting locations for modules;

(b) a splitter module comprising:

(i) a block with a mounting footprint to be received in one or more of the mounting locations;

(ii) an xDSL splitter circuit housed in the block with a first pair of contacts for electrical connection to the pair of outside plant wires and a second pair of contacts, a first circuit component of the circuit electrically between the first and the second pair of contacts and designed to pass only POTS signals from the first pair of contacts to the second pair of contacts;

(iii) a first inside pair of terminals located on the block electrically connected to the second pair of contacts and configured for having the first pair of inside wires connected thereto; and

(iv) a second inside pair of terminals located on the block, electrically connected to the outside pair of terminals so as to receive at least the xDSL signal, and configured for having the second pair of inside wires connected thereto; and

(v) a POTS jack connected to the block and capable of receiving a plug from a standard telephone, the POTS jack electrically connectable to the second pair of contacts to allow for testing of the POTS signal by the subscriber by inserting a telephone plug from a telephone into the POTS jack when the POTS jack is electrically connected to the second pair of contacts.

5 16. The assembly of Claim 15 further comprising at least one POTS line module mounted at a mounting location adjacent to the splitter module.

17. The assembly of Claim 15 wherein the NID further comprises an inner door that prevents unauthorized removal of the splitter module from its mounting location when in a closed position.

18. A splitter module for selectively passing a first signal from a combined signal having the first signal together with a second signal, the splitter module comprising:

(a) a housing;

(b) a first pair of terminals located on the housing;

5 (c) an RJ-11 jack located on the housing and an RJ-11 plug removably inserted in the RJ-11 jack to create a first demarcation point; and

10 (d) a first splitter circuit located in the housing and electrically in series between the first pair of terminals and the RJ-11 jack, the first splitter circuit designed to pass only the first signal to the RJ-11 jack when the combined signal is transmitted through the first pair of terminals to the first splitter circuit.

19. The splitter module of Claim 18 further comprising an RJ-45 jack located on the housing and an RJ-45 plug removably inserted in the RJ-45 jack to create a second demarcation point, the RJ-45 jack electrically connected to a point between the first pair of terminals and the first splitter circuit.

15 20. The splitter module of Claim 19 further comprising a second splitter circuit located in the housing and electrically in series between the point and the RJ-45 jack, the second splitter circuit designed to pass only the second signal to the RJ-45 jack when the combined signal is transmitted through the first pair of terminals to the second splitter circuit.

XDSL SPLITTER LINE MODULE FOR NETWORK INTERFACE DEVICE

ABSTRACT OF THE INVENTION

An xDSL splitter module is provided for mounting in a network interface device (NID) that contains an xDSL splitter circuit and the terminals to connect the circuit between outside
5 plant wires and two pairs of inside wires to deliver POTS and xDSL to the subscriber. The module also has at least a demarcation point for the POTS signal.

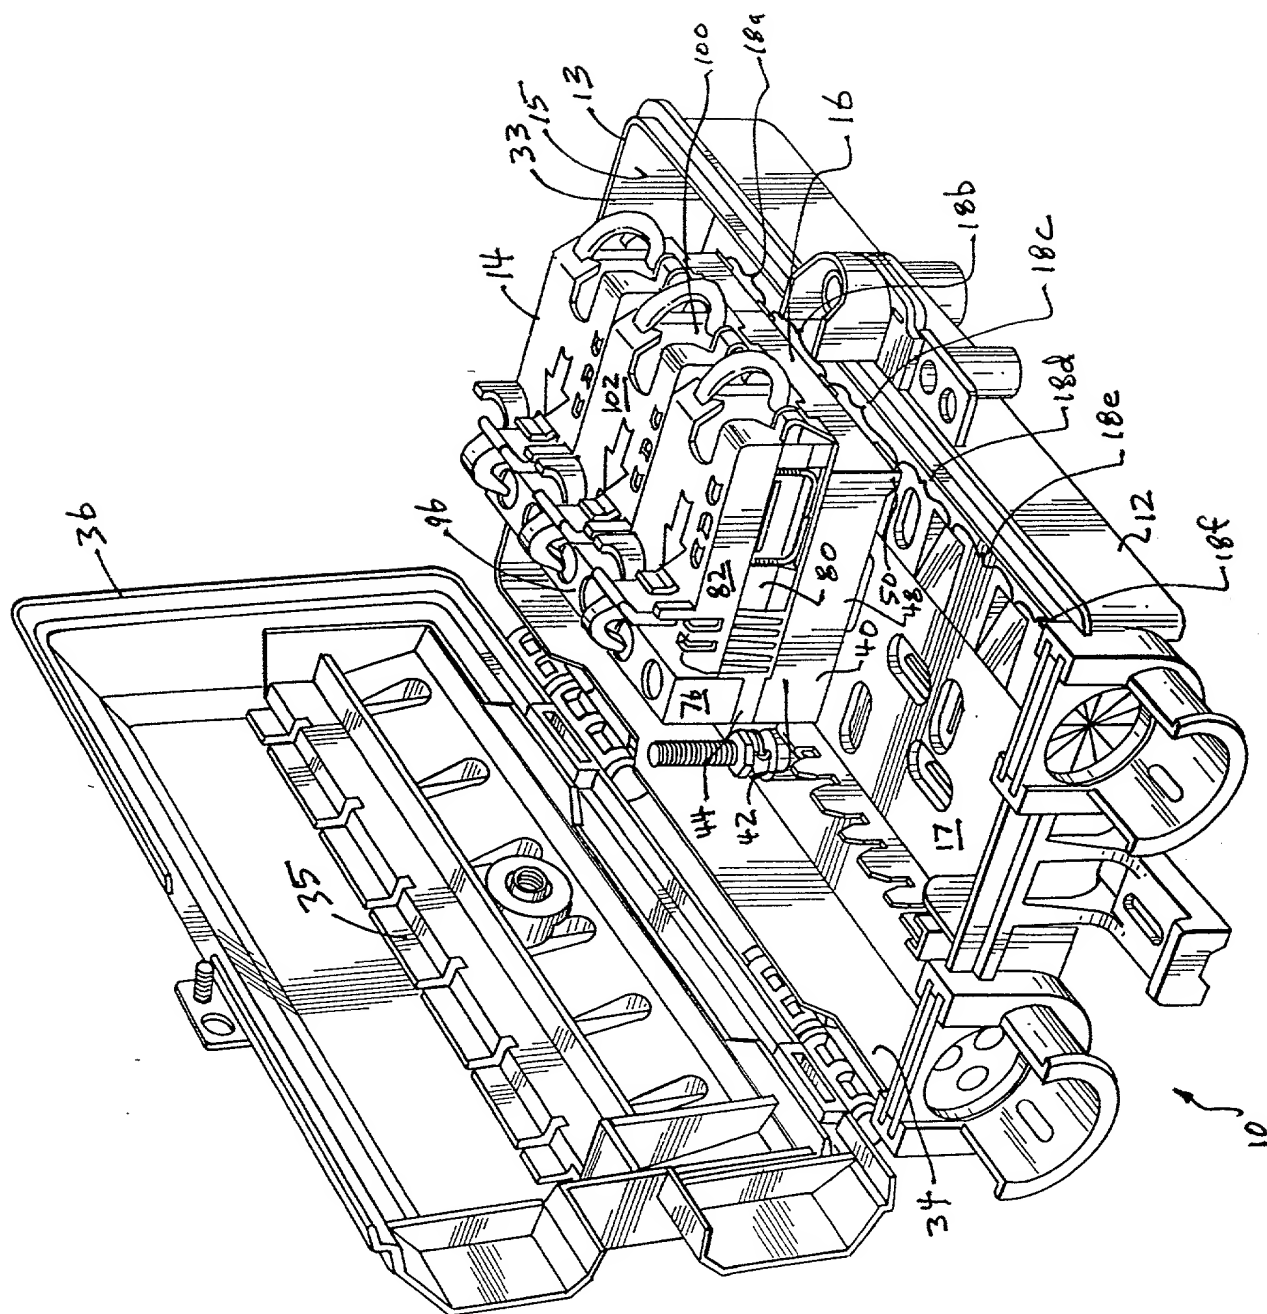


FIG. 1

FIG. 2

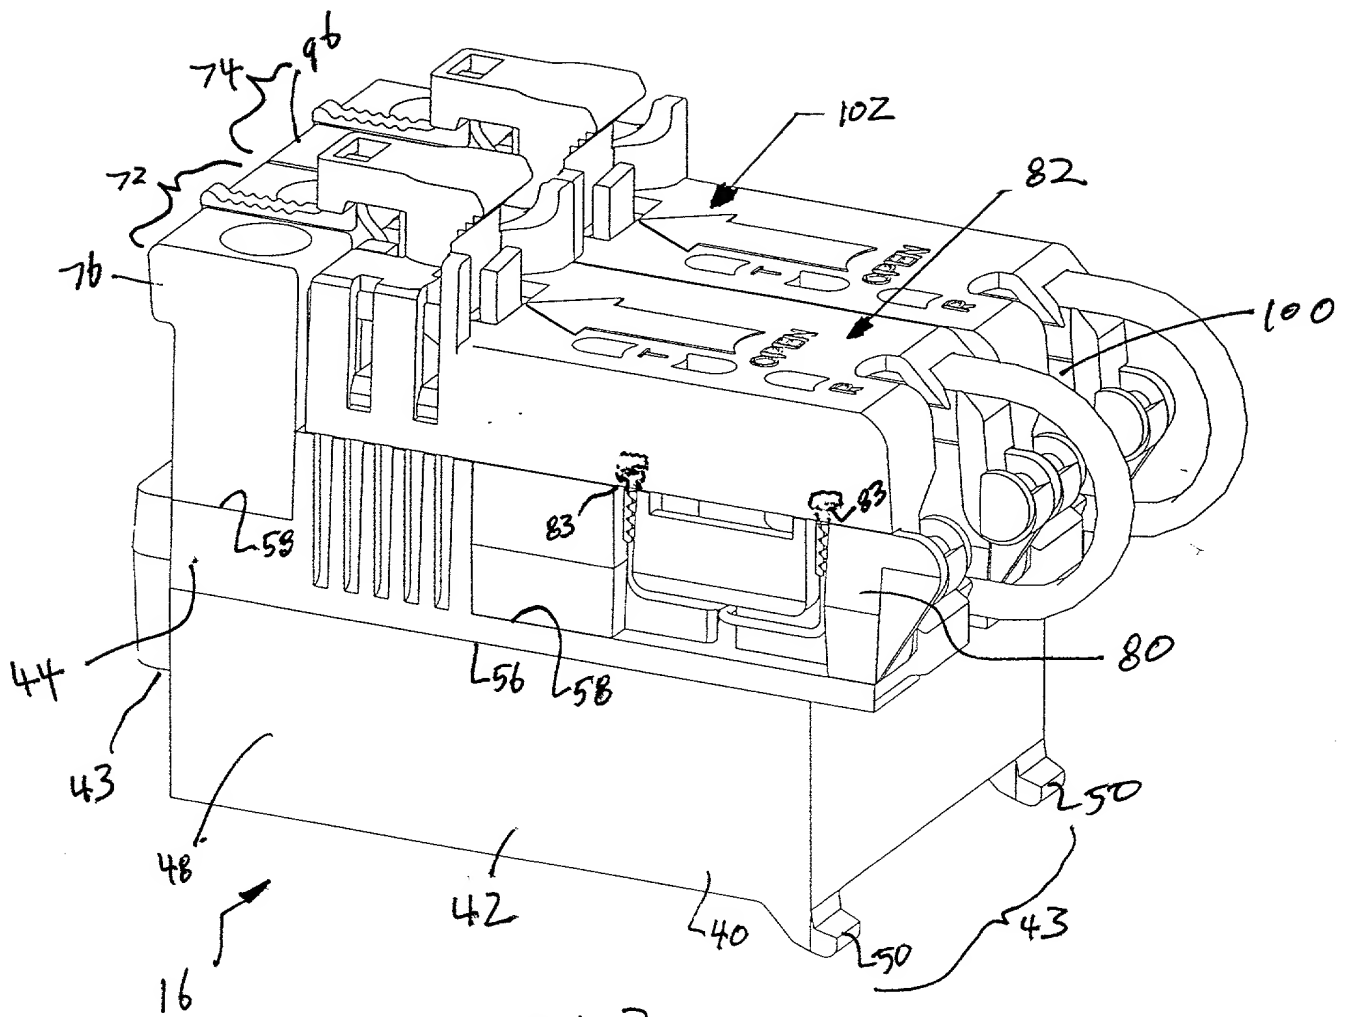


FIG. 2

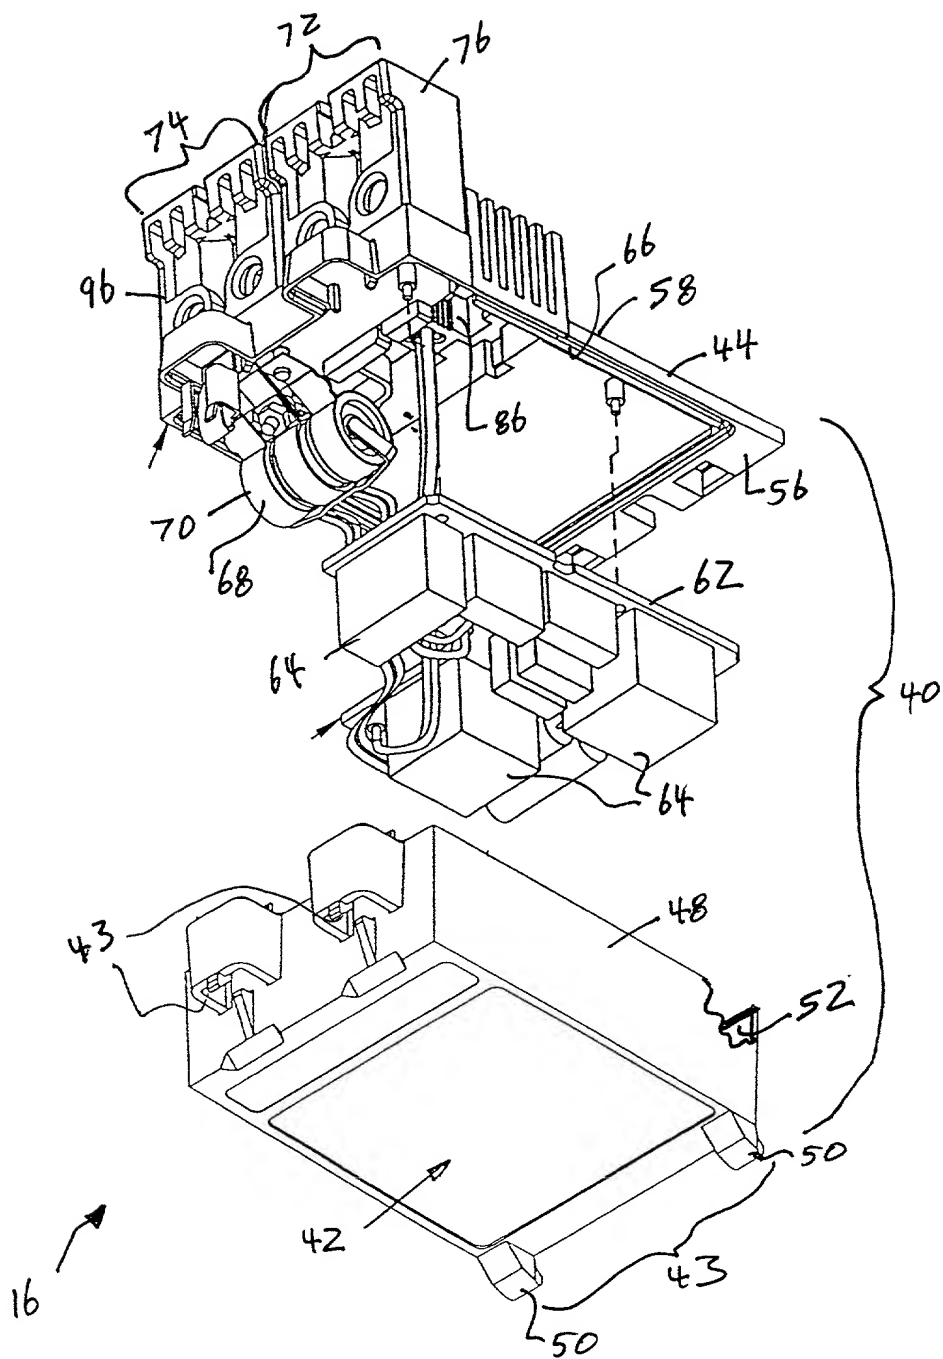


FIG. 3

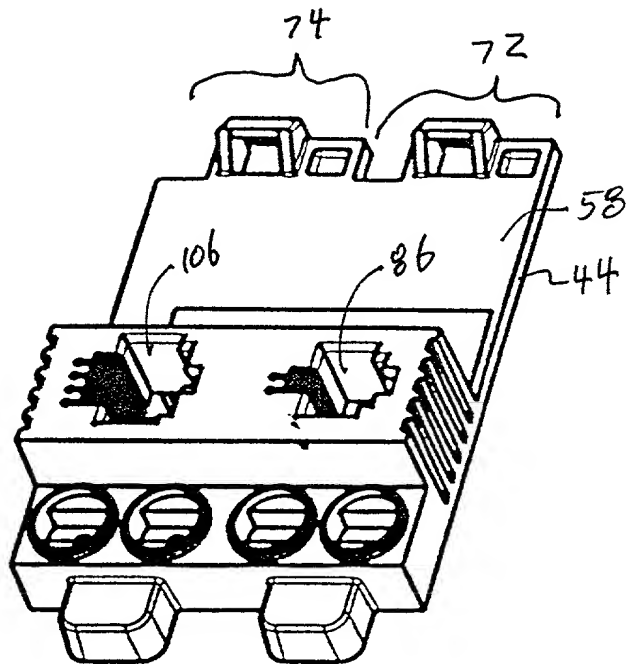


FIG. 4





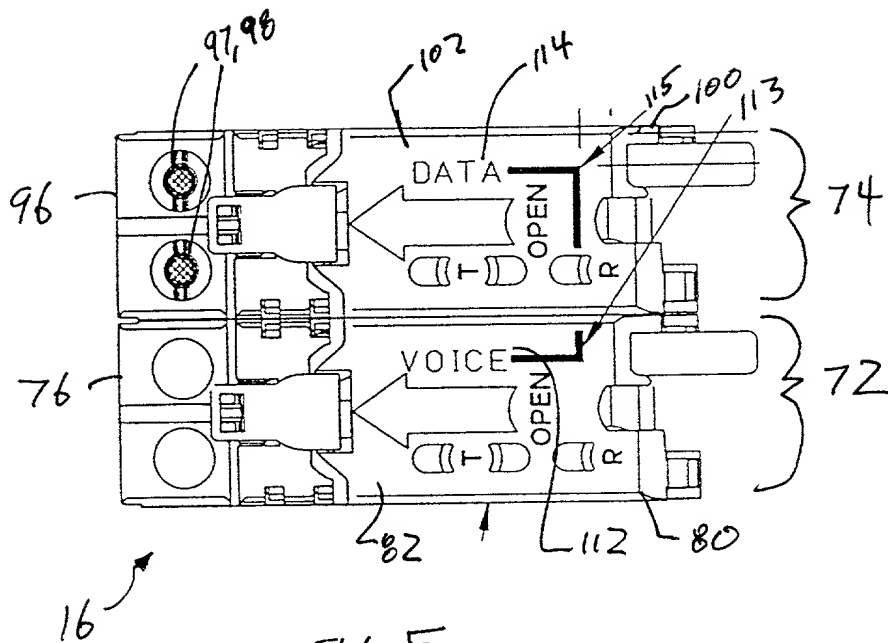


FIG. 5

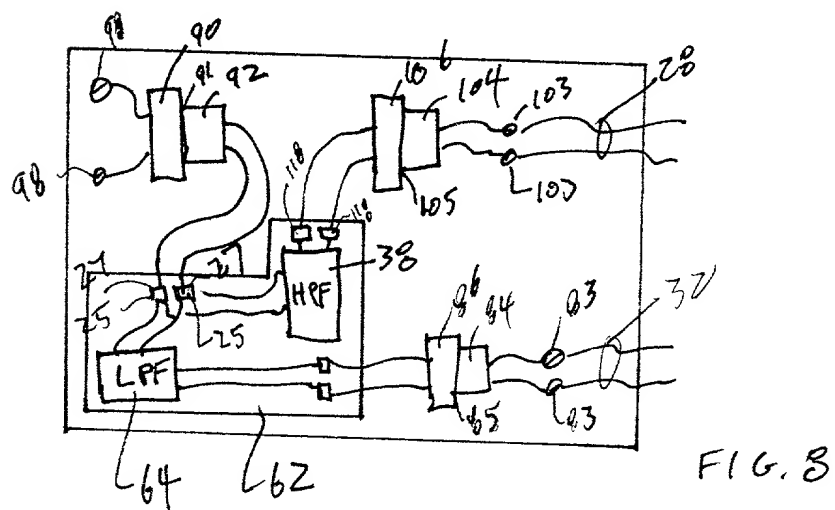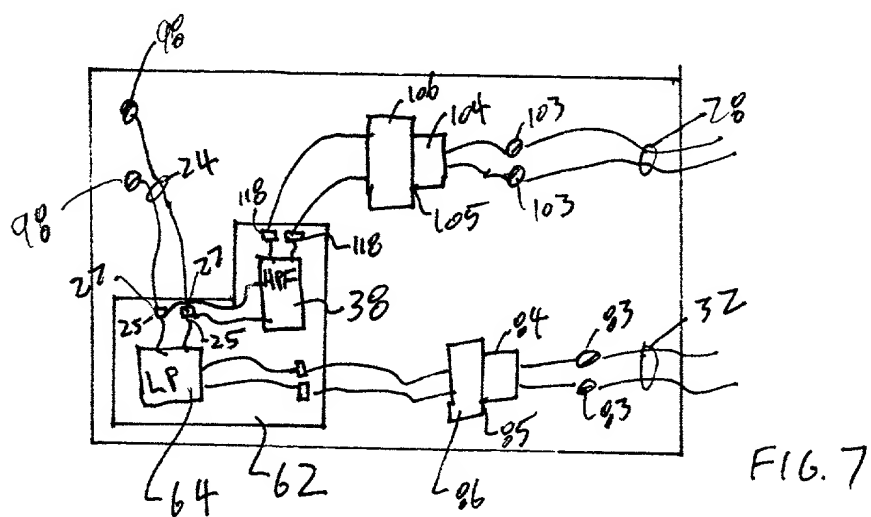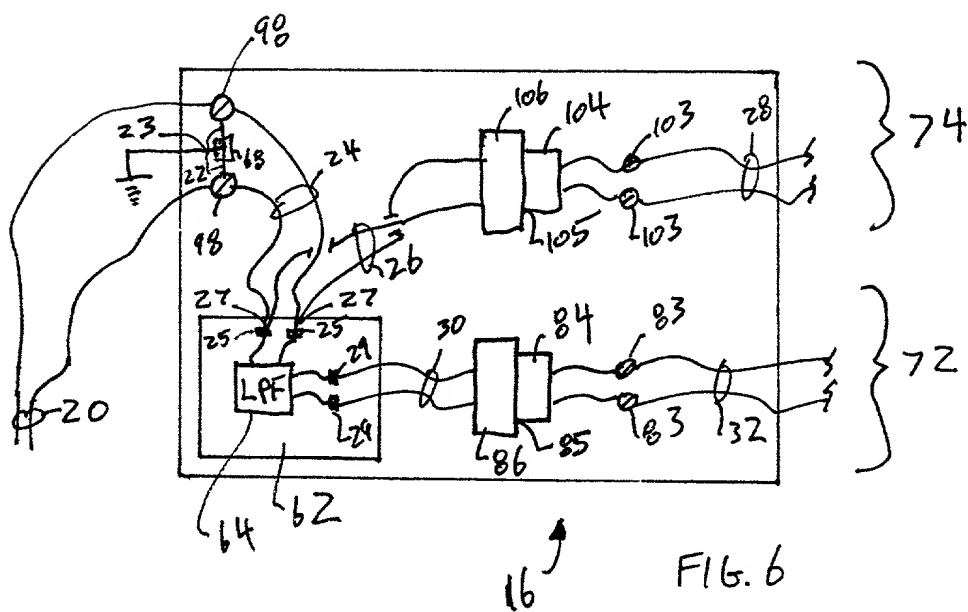

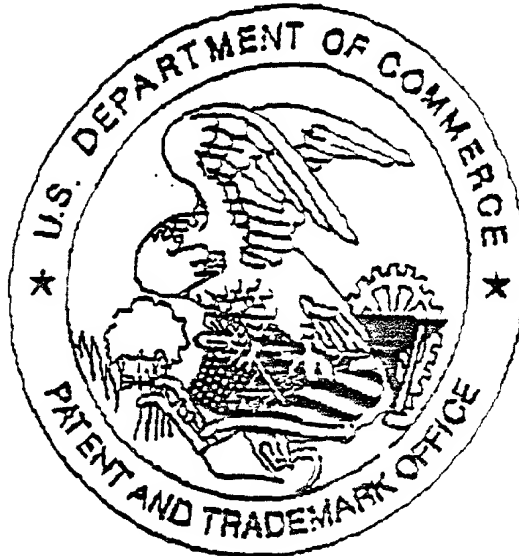

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
- ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages _____ do not meet these requirements.
 - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
 - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
 - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
 - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
- ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
 - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
 - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) _____ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) _____ are missing.
5. OTHER: No Declaration

2000155-1319
26 OCT 2000